

## WITH WHITE FRAMES 3 DIRECTIONS



### PRODUCT CODE

OPTICS	PRODUCT CODE
Ø 400 mm	<b>9040</b>
Ø 500 mm	<b>9050</b>
Ø 600 mm	<b>9060</b>
Ø 800 mm	<b>9080</b>
Ø 900 mm	<b>9090</b>

### WARRANTY

> Full warranty (optic, frame and fixings)\*


**P.A.S.** > Unbreakable > Light > Unalterable > Shock resistant  
**5 years warranty** > Anti-UV treated > Anti-static, Anti-scratch treatment  
 > 5 year warranty

### TECHNICAL SPECIFICATION

PRODUCT CODE	MAXIMUM VIEWING DISTANCE	GROSS WEIGHT (kg)	PACKAGING DIMENSIONS (mm)
<b>9040</b>	2 metres	2.6	490 x 150 x 470
<b>9050</b>	4 metres	4.3	680 x 210 x 700
<b>9060</b>	6 metres	5.7	680 x 210 x 700
<b>9080</b>	8 metres	9.6	870 x 380 x 910
<b>9090</b>	10 metres	11.3	1020 x 290 x 1030


- > The thermoplastic resin frame is treated and tested against UV to avoid cracking and yellowing  
Ref 9090 is equipped with a black joint & white rear
- > P.A.S® optics: high quality, clear and sharp image, with no distortion
- > Angle of convexity: for a field of vision of approximately 180° used at junctions where users are coming from 3 different directions
- > Fixing kit supplied
- > Manufactured in France

### INSTALLATION

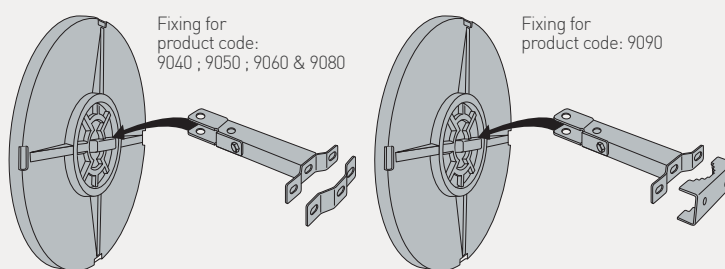

- > Multi-purpose mirrors are supplied with fully adjustable bolts and galvanised steel bracket kit for wall or post from 60 to 90mm in diameter
- > The kit allows the optimum orientation to be easily achieved
- > **The kit is robust and tested to withstand winds of up to 183 km/h**

### DIMENSIONS

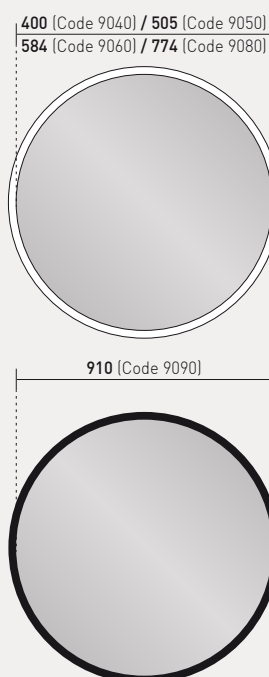

### RECOMMENDED INSTALLATION ON POST

