

## YELLOW AND BLACK FRAMES P.A.S® OPTICS



### PRODUCT CODE

OPTICS	FRAME	PRODUCT CODE
600 x 400 mm	680 x 500 mm	<b>984</b>
Ø 600 mm	Ø 750 mm	<b>986</b>
800 x 600 mm	950 x 750 mm	<b>988</b>

### WARRANTY

> Full warranty (optic, frame and fixings)\*

<b>P.A.S®</b> 5 years warranty	> Unbreakable > Light > Unalterable > Shock resistant
	> Anti-UV treated > Anti-static, Anti-scratch treatment
	> 5 year warranty

### TECHNICAL SPECIFICATION


PRODUCT CODE	MAXIMUM VIEWING DISTANCE	GROSS WEIGHT (kg)	PACKAGING DIMENSIONS (mm)
<b>984</b>	9 metres	4.6	770 x 140 x 780
<b>986</b>	11 metres	6.5	770 x 140 x 790
<b>988</b>	20 metres	9.2	990 x 140 x 1225

- > The thermoplastic resin frame is treated and tested against UV to avoid cracking and yellowing. It's adhesive tapes are durable and of high quality
- > P.A.S® optics: high quality, clear and sharp image, with no distortion
- > Angle of convexity: for a field of vision of approximately 90° used at junctions where users are coming from 2 different directions
- > Fixing kit supplied
- > Manufactured in France

### OPTION


- > Anti-frost and anti-condensation system: self-regulating heating film 220 V/50-100 W (Code CH). Factory fitted. Fuse box not supplied

### INSTALLATION

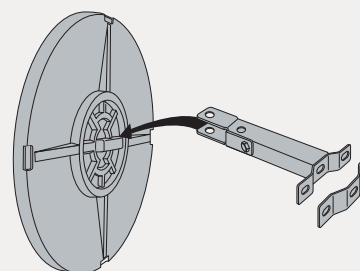


- > All mirrors are supplied with fully adjustable bolts and galvanised steel bracket kit for wall or round posts (Ø 60 to 90 mm) or rectangular posts (60 x 80 mm or 80 x 80 mm)
- > The kit allows the optimum orientation to be easily achieved

### DIMENSIONS

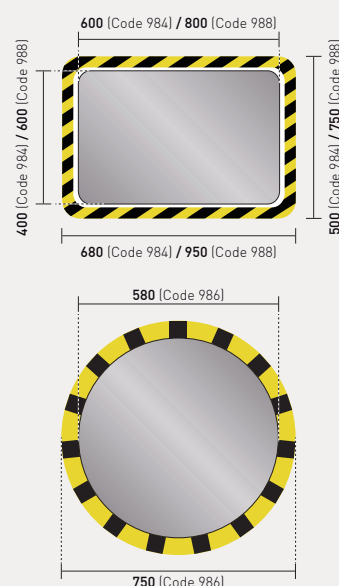

### RECOMMENDED INSTALLATION ON POST

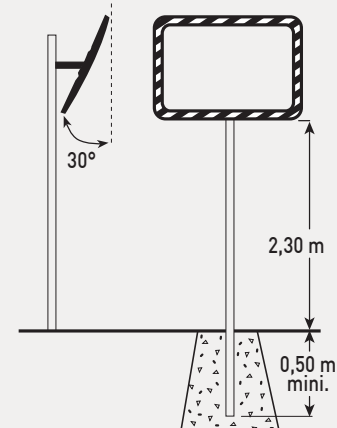

## YELLOW AND BLACK FRAMES POLYMER OPTICS



### PRODUCT CODE

OPTICS	FRAME	PRODUCT CODE
600 x 400 mm	680 x 500 mm	<b>584</b>
Ø 600 mm	Ø 750 mm	<b>586</b>
800 x 600 mm	950 x 750 mm	<b>588</b>

### WARRANTY

> Full warranty (optic, frame and fixings)\*



> Unbreakable > Light > Unalterable > Shock resistant  
> Anti-UV treated > 3 year warranty

### TECHNICAL SPECIFICATION


PRODUCT CODE	MAXIMUM VIEWING DISTANCE	GROSS WEIGHT (kg)	PACKAGING DIMENSIONS (mm)
<b>584</b>	9 metres	4.6	770 x 140 x 780
<b>586</b>	11 metres	6.5	770 x 140 x 790
<b>588</b>	20 metres	9.2	990 x 140 x 1225

- > The thermoplastic resin frame is treated and tested against UV to avoid cracking and yellowing. It's adhesive tapes are durable and of high quality
- > Polymir® optics: high quality, clear and sharp image, with no distortion
- > Angle of convexity: for a field of vision of approximately 90° used at junctions where users are coming from 2 different directions
- > Fixing kit supplied
- > Manufactured in France

### OPTION


- > Anti-frost and anti-condensation system: self-regulating heating film 220 V/50-100 W (Code CH). Factory fitted. Fuse box not supplied

### INSTALLATION

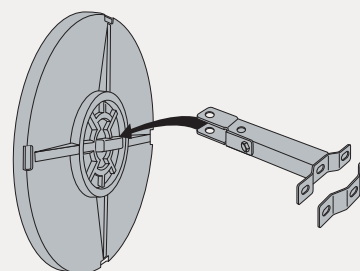

- > All mirrors are supplied with fully adjustable bolts and galvanised steel bracket kit for wall or round posts (Ø 60 to 90 mm) or rectangular posts (60 x 80 mm or 80 x 80 mm)
- > The kit allows the optimum orientation to be easily achieved

### DIMENSIONS

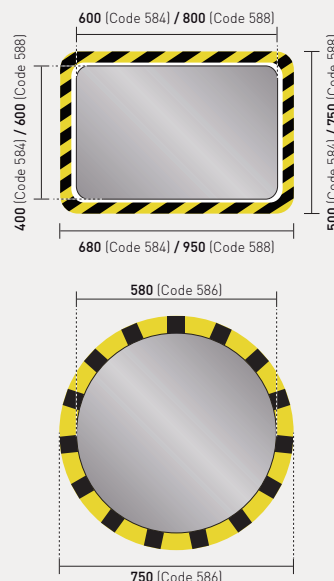

### RECOMMENDED INSTALLATION ON POST

